

# LLM-Powered AI Agent Systems and Their Applications in Industry

Guannan Liang  
Independent AI researcher  
guannan.liang@yahoo.com

Qianqian Tong  
Computer Science Department  
UNC Greensboro, NC  
q\_tong@uncg.edu

**Abstract**—The emergence of Large Language Models (LLMs) has reshaped agent systems. Unlike traditional rule-based agents with limited task scope, LLM-powered agents offer greater flexibility, cross-domain reasoning, and natural language interaction. Moreover, with the integration of multi-modal LLMs, current agent systems are highly capable of processing diverse data modalities, including text, images, audio, and structured tabular data, enabling richer and more adaptive real-world behavior. This paper comprehensively examines the evolution of agent systems from the pre-LLM era to current LLM-powered architectures. We categorize agent systems into software-based, physical, and adaptive hybrid systems, highlighting applications across customer service, software development, manufacturing automation, personalized education, financial trading, and healthcare. We further discuss the primary challenges posed by LLM-powered agents, including high inference latency, output uncertainty, lack of evaluation metrics, and security vulnerabilities, and propose potential solutions to mitigate these concerns.

**Index Terms**—AI Agent, LLMs

## I. INTRODUCTION

An *agent* is an autonomous entity capable of perceiving its environment and taking actions to achieve specific goals. When multiple agents engage in coordination or competition within a shared environment, they form an *agent system* [1]. Artificial Intelligence (AI) techniques enable the development of AI agent systems, which integrates perception, reasoning, learning, and action to behave intelligently in a dynamic environment [2].

Recent progress in large language models (LLMs) has significantly changed the AI agent system, driving advances in automation and human-AI collaboration [3]–[9]. Compared to traditional agent systems, which mainly relied on task-specific rules [10], [11] or reinforcement learning (RL) [12]–[15], LLM-powered AI agent system provides significantly more adaptability in dynamic and open environments. Agents can process and generate insights from diverse data modalities, including text, images, audio, and structured tabular data. As a result, current agent system demonstrates the ability to generalize to new tasks, produce contextually rich responses, and enable more natural human-AI interaction.

In the LLM era, people often confuse AI agent systems with AI models. To clarify the distinction between the two fundamental concepts in AI, it is crucial to establish precise definitions. An *agent* represents a comprehensive architecture that includes environmental perception, autonomous decision-

making, and goal-directed action execution [16]. Specifically, an *AI agent* is characterized as a self-contained computational entity that: (1) continuously perceives and interprets its environment through various input modalities, (2) processes these perceptions through cognitive functions to make context-aware decisions, and (3) executes appropriate actions to achieve predefined objectives. In contrast, an *AI model* constitutes a specialized computational component that performs specific patterns recognition or data transformation tasks, serving as a functional building block within larger systems. The fundamental distinctions lie in the agent's autonomous capability to initiate and execute actions within its environment. In the LLM paradigm, AI agent systems (Fig.1) emerge through the systematic integration of multiple AI models with decision-making frameworks, interactive interfaces and automated control mechanisms, thereby creating sophisticated, goal-oriented AI entities.

To better understand the design space of AI agent systems, it is useful to explore their major categories. Agent systems can be categorized according to their mode of interaction with the environment, which determines their operational domain and capabilities. Broadly, we define three major types of agent systems: Software-Based Agents, Physical Agents, Adaptive and Hybrid Agents.

Software-Based Agents (Sandbox Environment) operate entirely in digital environments and interact with users, applications, or online data sources. They do not have a physical presence, but can influence the world through digital means such as APIs, databases, Internet access, and simulated environments. Here are some of its industry use cases: LLM-powered Chatbots and virtual assistants - such as ChatGPT [17], Claude [18], Gemini [19], DeepSeek [20] - as well as automated financial trading agents [21]–[25].

In contrast to software-based agents that operate solely in digital environments, physical agents are embodied systems that perceive and act in the real world. Physical agents, which operate in sensor-based environments, interact with the physical world using sensors, actuators, and robotics. They interact with the physical world using sensors (such as cameras, LiDAR, and microphones) to perceive their environment, and actuators (including motors, wheels, and robotic arms) to perform actions. An application of physical agents is in smart manufacturing [26].

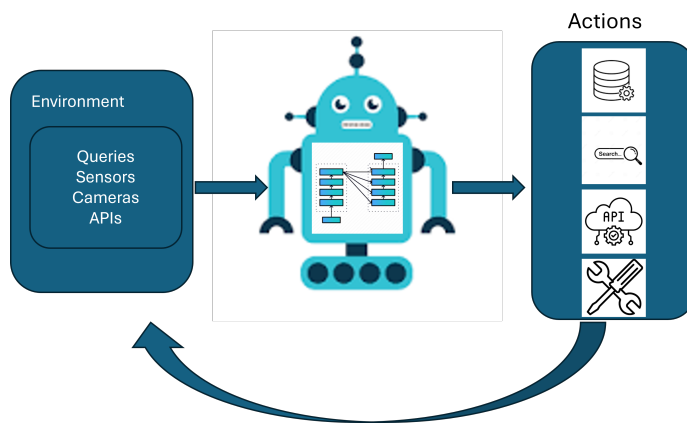


Fig. 1. LLM-Powered AI Agent System.

By combining the capabilities of software-based and physical agents, hybrid agents emerge as a powerful class of systems that enable seamless integration with the real world. Adaptive and Hybrid Agents (Real-World Integration) operate in a feedback-driven environment, continuously learning from both digital and physical interactions by processing multi-modal data such as text, images, voice, and sensor inputs, and adapting their decision-making over time. Here are some of its industry use cases: AI-driven traffic management optimizing real-time road congestion [27], Healthcare AI assistants: agents that monitor patient data, recommend treatments and interact with doctors [28]–[31], AI-powered predictive maintenance systems combining software analytics with sensor data [32], [33], AI-powered supply chain management that optimize logistics by integrating real-world shipment tracking with digital AI forecasting [34].

Most existing work or surveys on agent systems fall into two major directions: one focusing on theoretical foundations such as agent modeling and multi-agent coordination, and the other on practical frameworks such as reinforcement learning and system implementation [2]–[9], [12]–[15]. However, the applications of LLM-powered AI agent systems in real-world industry settings remain relatively underexplored, despite growing interest and potential impact. This paper aims to provide some insights from an industry-focused perspective on the development and categorization of LLM-powered agent systems.

## II. AGENT SYSTEMS OVERVIEW

### A. Agent Systems Before LLM era

Before the emergence of LLM-powered agents, traditional agents were typically based on rule-based logic, search, planning, or RL, and were often designed for narrow and task-specific domains. These systems were effective in structured environments; however, when dealing with unstructured data such as natural language or images, or when transferred to new environments, they suffered from poor generalization, lacked adaptability, and were not capable of natural human-AI interaction.

Rule-based agent systems were among the earliest forms of agent, relying on predefined rules and decision trees to perform reasoning. Expert systems such as MYCIN [10] for medical diagnosis and DENDRAL [11] for chemical analysis use structured if-then rules to make domain-specific decisions. Throughout the 1980s and 1990s, business rule engines, decision trees, and logic programming systems had been widely used across industries such as healthcare, finance and manufacturing [35]. The introduction of Multi-Agent Systems in the 1990s enabled distributed decision-making, allowing agents to interact with each other to solve complex problems such as supply chain management and automated trading [5].

Following rule-based agents, RL emerged as a powerful framework for training agents to make sequential decisions by interacting with their environment [12]–[15]. RL agents learn optimal behaviors through a process of trial and error, driven by the maximization of cumulative rewards. Unlike predefined rule, RL agents autonomously discover strategies by receiving feedback in the form of rewards or penalties. Key algorithms, such as Q-learning [36], [37], Deep Q-Networks (DQN) [38], [39], and Policy Gradient Methods [40], enabled RL agents to master complex tasks, including game playing, robotic control, and dynamic resource management. In particular, systems such as AlphaGo [41] demonstrated the power of RL by defeating human champions in the game of Go, showcasing the potential of agents to surpass human expertise in structured environments. However, RL agents are highly task-specific and often fail to generalize well, requiring retraining even for minor environment changes — unlike LLMs, which can adapt to tasks with zero-shot or few-shot prompting.

### B. LLM-powered Agent System

LLM-powered agents leverage LLMs [42] and multi-modal foundation models [43] to enable flexible and adaptive decision-making. These agents can process text, images and audio, making them applicable across diverse industries, including healthcare [44], finance [45], and manufacturing [46]–[48]. Unlike rule-based and RL agents, LLM-powered agents do not rely on predefined decision trees and expensive

explorations, enabling them to generalize to new and evolving tasks.

These agents are capable of a wide range of advanced functions, including natural language understanding, autonomous problem-solving, planning, reasoning, and human-like interaction. More importantly, LLM-powered agents significantly enhance human-AI collaboration by enabling context-aware dialogue, intelligent virtual assistance, and real-time decision support. Their ability to process multi-modal inputs — such as text, images, and voice — allows them to operate effectively in diverse tasks, including visual data interpretation, multi-turn conversations, and voice-guided workflows. This versatility makes them valuable tools in a complex, data-rich environment.

Alongside their strengths, LLM-powered agents also face several primary challenges, including high inference latency, the lack of standardized benchmarks and evaluation metrics, and privacy concerns. We will discuss these challenges in Section IV.

### C. Architecture of LLM-Powered Agent System

Theoretically, a LLM-powered agent system integrates several critical components: (1) At its core, the **LLM** serves as the cognitive engine, responsible for high-level reasoning, planning, and natural language understanding. Surrounding this core are supporting modules that extend its capabilities: (2) **Tool utilization**, facilitated by techniques like Multi-Context Prompting (MCP) [49], [50], allows the agent to dynamically invoke APIs, databases, or third-party models to accomplish specialized tasks; (3) **Memory**, typically implemented via Retrieval-Augmented Generation (RAG) [51], [52], ensures the agent can access external knowledge and avoid hallucination [53], [54]; (4) **Environmental sensing**, which is achieved through multi-modal inputs—such as text, images, speech, or sensor data—captured by models or devices like cameras and IoT hardware, enabling the agent to perceive and react to its surroundings; (5) An essential auxiliary layer is the **guardrail** mechanism [55]–[57], which filters both inputs and outputs for safety, compliance, and task relevance, thereby ensuring trustworthy and reliable behavior in real-world deployments.

In practice, we summarize the LLM-powered agent system in the framework as shown in Figure 2, where each component ensures contextual awareness, decision efficiency, and reliable execution. The LLM agent system starts with a Task Input, which defines the objective and provides textual or structured instructions that the agent must process. Once the task is identified, the agent performs Context Augmentation, leveraging external knowledge sources such as databases, search engines, and API calls to other agents. This step ensures that the agent can ground its decisions in relevant and up-to-date information rather than relying only on its pre-trained knowledge. The system then enters a Decision and Planning Phase, where the LLM model generates a structured response based on environmental context, retrieved knowledge, and multi-modal data. However, since GenAI output can be highly variable

and sometimes unstructured, an Output Guardrail Mechanism ensures compliance with predefined formats, validation rules, and industry-specific constraints before final execution. The final Action Execution step translates structured outputs into real-world commands, whether it is interacting with software, triggering automation scripts, or instructing robotic systems. The system operates iteratively, continuously sensing the environment, adjusting plans, and refining actions until the goal is successfully achieved.

## III. INDUSTRY APPLICATIONS

Previous surveys [2]–[9] on LLM agents mainly focused on theoretical foundations, however, system design and applications across industries still remains underexplored. In this work, we categorize industry applications into the following key domains.

### A. Chatbot: Live Customer Service

LLM-powered Chatbots have revolutionized customer interaction by providing dynamic, context-aware, and natural language responses. Unlike traditional rule-based systems, modern Chatbots can understand complex queries and significantly improve the accuracy of responses through LLMs [58]–[61]. Chatbots are widely used in customer support, marketing automation, and interactive user interfaces. For example, LLM-powered Chatbot systems, such as ChatGPT [17], Claude [18], Gemini [19], DeepSeek [20], have been integrated into e-Commerce websites to assist users with product recommendations, query resolution, and after-sales support [62].

### B. Software Development

LLM-based coding assistants are transforming the software development process by automating code generation, debugging, and documentation [63], [64]. These agents leverage advanced natural language understanding to translate human instructions into executable code, thereby reducing manual effort and enhancing productivity. For instance, the use of automated code synthesis agents, as discussed in previous literature, has significantly lowered the barrier for non-expert developers to implement complex algorithms. In cybersecurity, LLM-based defense and attack agents can proactively detect vulnerabilities and simulate potential exploits, enhancing system robustness [65], [66]. In addition, industry-focused coding agents, like Github Copilot [67], Cursor [68], help developers by predicting code snippets and suggesting improvements, making software engineering more efficient.

### C. Manufacturing Automation

In the manufacturing sector, LLM-powered robots facilitate automated decision-making and precision control [46]–[48]. They are utilized for automating tasks such as product design, quality control, and supply chain management by interpreting complex instructions and extracting insights from extensive datasets. Additionally, they play a role in enhancing robot control systems, leading to more innovative and efficient manufacturing practices. For example, the LLM-powered agent can

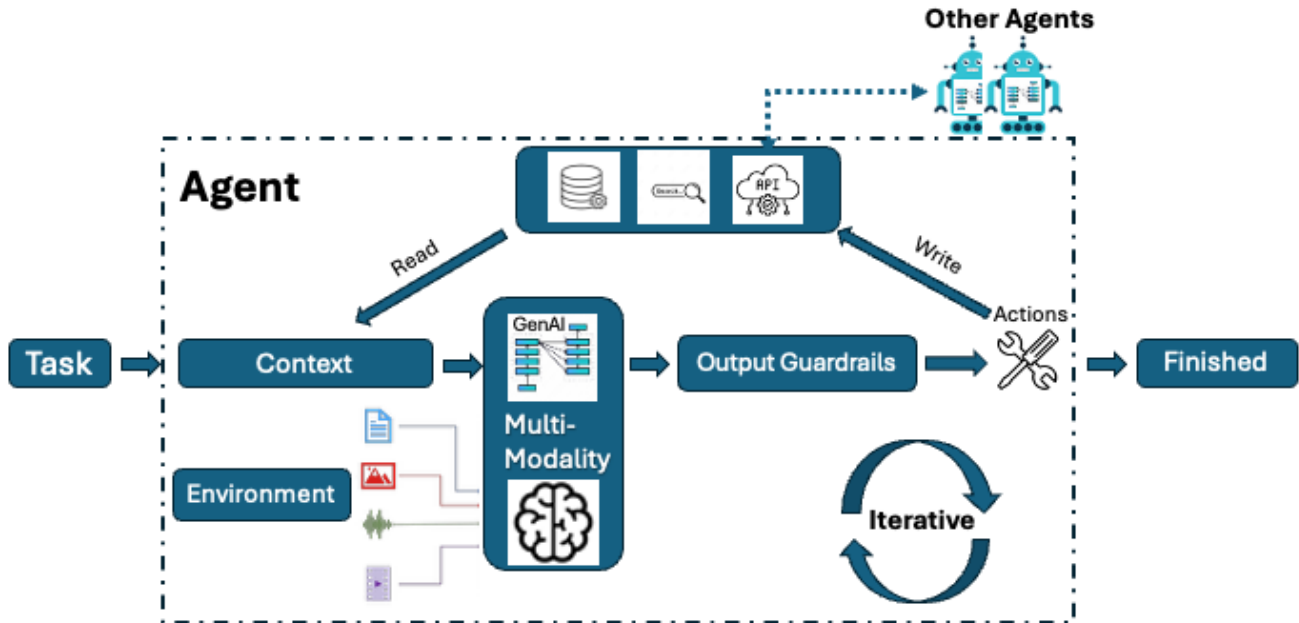


Fig. 2. Architecture of LLM-Powered Agent System.

significantly advance the development of human-centric smart manufacturing by facilitating the integration of human-robot interaction and collaboration [26].

#### D. Personalized Education

LLM-powered agents are reshaping personalized education by providing dynamic, context-aware support for both learners and educators across diverse educational tasks [69], [70]. These agents serve two primary functions: as teaching assistants that automate instructional planning, resource recommendation, classroom simulation, and feedback generation [71]–[73] and as personalized learning assistants that adaptively support student learning paths [71], [74]. By leveraging memory, tool-use, and planning capabilities, LLM-powered agents can track student progress, identify learning gaps, and dynamically generate customized exercises and feedback. Additionally, LLM-powered agents are being deployed in domain-specific education, such as mathematics [75] and science [76], [77], where they guide students through complex reasoning tasks. This multifaceted support not only enhances learner engagement and understanding, but also reduces educators’ workload, marking LLM-powered agents as a foundational component in next-generation educational ecosystem.

#### E. Healthcare

In healthcare, LLM-powered agents facilitate patient interaction, medical record analysis, and clinical decision support. These agents can extract key information from patient histories, synthesize medical knowledge, and generate diagnostic

recommendations [44]. For instance, conversational healthcare agents assist doctors by summarizing patient reports and suggesting evidence-based treatments. LLM-powered agents such as MDAgents [28], MedAide [29], and Polaris [30] demonstrate how they can simulate doctor-patient interactions, reduce cognitive biases, and coordinate multi-agent workflows across clinical stages including diagnosis, medication, and follow-up care. Moreover, LLM-based diagnostic assistants can interact with tools and databases [31], which improve precision by correlating symptoms with medical databases, offering clinicians a more comprehensive view of potential diagnoses. Such applications improve care quality while minimizing administrative workload.

#### F. Financial Trading

LLM-powered trading agents are emerging as a transformative technology in financial markets, leveraging large-scale language models to process unstructured data, generate trading insights, and make informed investment decisions [45]. These agents are typically designed to serve two roles: LLM agents as traders [21]–[25], where the model directly outputs buy-hold-sell signals, and LLM agents as alpha miners [78], [79], where the model discovers new predictive features for quantitative strategies. Agents excel at integrating multiple data modalities: textual (e.g. financial news, reports), numerical (e.g. price time series), visual (e.g. trading charts), and simulated data to generate predictions or trading actions. These agent systems demonstrate strong performance in backtesting.

Despite promising results, challenges remain in latency, generalization, and system integration, especially for high-frequency trading and real-time decision-making environments.

## IV. CHALLENGES

### A. High Inference Latency

One of the most significant challenges faced by LLM-powered agents in real-world applications is high inference latency, which directly results in high operational costs and computational inefficiencies. Due to their massive parameter size, LLMs (such as GPT-4) introduce significant inference overhead and long execution latency [80]. This results in long response times, especially when deployed for tasks requiring real-time interaction, like customer support, financial trading, or industrial monitoring.

The issue becomes even more pronounced in environments where quick decision-making is critical. For example, in healthcare settings where agents are expected to provide rapid diagnostic assistance, high latency can compromise patient care. In financial trading, delayed responses can result in missed market opportunities or significant financial loss. High latency not only affects the user experience but also increases infrastructure costs, as maintaining low-latency responses often necessitates deploying multiple high-performance GPUs or TPUs. Moreover, as LLM models scale up, inference times become increasingly impractical for applications requiring low-latency processing.

To address high inference latency in LLM-powered agents, a combination of model compression and efficient deployment strategies is essential. Compressed models with quantization [81]–[85], pruning [86]–[88], and knowledge distillation [89]–[91] reduce model size and speed up processing without a significant loss of accuracy. Efficient deployment practices, including optimizations for computation [92]–[96] and memory [97], [98] further mitigate latency issues. Additionally, deploying LLM agents closer to users via edge computing and leveraging hardware accelerators like TPUs enhance real-time responsiveness. Implementing caching mechanisms for repetitive tasks and using adaptive sampling to minimize unnecessary full-model inference also contribute to reducing processing time and operational costs, making LLM agents more practical for real-time applications.

### B. Uncertainty of LLM Output

LLM agents often face the challenge of producing uncertain or unreliable outputs [99], or hallucination [100]. Since LLMs are trained on vast and diverse datasets, they may generate responses that are contextually inaccurate, biased, or even factually incorrect. This uncertainty is problematic in high-stakes applications, such as legal document analysis, medical diagnosis, or autonomous systems, where incorrect outputs can lead to significant consequences. Additionally, LLMs can generate hallucinations, plausible-sounding but entirely false information, which can undermine user trust and the reliability of the system. This uncertainty makes it challenging

to integrate LLM agents into mission-critical environments where accuracy and consistency are paramount.

To address the uncertainty of LLM output, it is essential to integrate a guardrail layer after the output layer, acting as a post-processing validation mechanism [55]–[57]. This guarding layer can employ techniques such as factual consistency checks, out-of-distribution detection, and context verification to filter and refine the generated responses. Additionally, leveraging ensemble methods where multiple LLM instances provide responses and voting mechanisms select the most consistent output can enhance reliability [101]–[103]. Integrating external knowledge bases, obtained by Retrieval-Augmented Generation (RAG) [52] and external tools [50], [104], to cross-check facts can also reduce misinformation risks. In high-stakes applications, incorporating a human-in-the-loop system ensures that sensitive outputs undergo manual validation before deployment. These strategies collectively improve the robustness of LLM agents, minimizing accumulated errors and maintaining user trust.

### C. Lack of Benchmarks and Evaluation Metrics

One of the critical challenges in the development and deployment of LLM-powered agent systems is the lack of standardized benchmarks and evaluation metrics [105]. Although there are numerous studies and metrics designed to evaluate the performance of LLMs themselves, these metrics often fall short when applied to complex agent systems that involve decision-making, multi-modal processing, and human-AI interactions [4]. LLM-based agents go beyond generating coherent text—they perform tasks such as planning, interacting with other systems, and adapting to dynamic environments. As a result, evaluating their performance requires a comprehensive approach that considers not only linguistic accuracy but also task success rate, adaptability, context awareness, and human satisfaction. The absence of universally accepted benchmarks makes it challenging to compare different systems, track progress, and ensure reliability in practical applications.

Hence, developing domain-specific benchmarks and multi-dimensional evaluation frameworks that account for the diverse functionalities of LLM-powered agents is necessary. One promising approach is to create task-oriented metrics that assess performance based on goal achievement and interaction quality, such as task success rate, dialogue coherence, and response accuracy [106]–[110]. Additionally, employing human-centric evaluation methods — such as user satisfaction surveys and feedback — can capture qualitative aspects that automated metrics might miss [111]. Another strategy is to develop simulation environments that mimic real-world tasks, allowing for controlled and reproducible testing of agent performance. Benchmarking competitions and shared datasets curated for multi-agent interactions [8] and real-world scenarios [112] can also help establish community standards. By combining quantitative metrics with qualitative assessments, the evaluation of LLM-powered agents can become more comprehensive, enabling consistent comparisons and fostering innovation.

#### D. Security and Privacy Concerns

Security and privacy are significant challenges when deploying LLM-powered agent systems due to their susceptibility to attacks and data leakage. One of the most critical issues is the jailbreak of AI agent systems, where adversaries manipulate the input prompts to bypass safety mechanisms, leading the agent to generate harmful or unethical content [113]–[115]. Such vulnerabilities can be exploited to spread misinformation, generate malicious code, or perform unauthorized actions. Additionally, LLM agents often process sensitive user data, posing risks of unintentional data leakage. Attackers can use prompt injection attacks to trick the model into revealing proprietary or personal information [116]. Furthermore, model inversion attacks may reconstruct training data from the model’s responses, violating data privacy regulations. These security loopholes can result in significant harm, especially in industries where data confidentiality and system integrity are paramount, such as finance, healthcare, and critical infrastructure.

To address security and privacy concerns, it is essential to implement multi-layered defense mechanisms throughout the LLM-powered agent system. First, incorporating a guarding layer that actively filters and validates user inputs can help detect and block potential jailbreak attempts [56]. Utilizing adversarial training techniques, where the model is exposed to harmful prompts during training, can increase robustness against prompt injection [117], [118]. Moreover, employing differential privacy techniques ensures that the model’s responses do not inadvertently reveal individual data points from the training set [119], [120]. Deploying content moderation pipelines [121] and using response validation mechanisms [122] can further safeguard against generating inappropriate or harmful outputs. By integrating these proactive measures, LLM-powered agent systems can be built significantly more secure and privacy-compliant.

#### V. CONCLUSION

This paper studies LLM-powered AI agent systems, tracing their evolution from rule-based and reinforcement learning frameworks to modern LLM-driven architectures. By examining both historical and contemporary developments, we provide a structured understanding of how LLMs and multi-modal AI techniques are shaping next-generation intelligent agents. We then demonstrate how LLM-powered agents are revolutionizing diverse industries by enabling automation, intelligent decision-making, and enhanced human-AI collaboration. Along with the strong capabilities, LLM-powered agents still face several challenges, such as high inference latency, output uncertainty, inadequate evaluation metrics, and security vulnerabilities. Addressing these issues requires a combination of model optimization, efficient deployment strategies, robust evaluation frameworks, and multi-layered security protocols. As LLM-powered agents continue to evolve, it is crucial to develop solutions that enhance their scalability, reliability, and ethical compliance. Future research should focus on creating more adaptive and context-aware agents that seamlessly

integrate into complex industrial ecosystems. By addressing existing challenges, the next generation of intelligent agent systems can achieve broader and more reliable real-world applications.

#### REFERENCES

- [1] E. Oliveira, K. Fischer, and O. Stepankova, “Multi-agent systems: which research for which applications,” *Robotics and Autonomous Systems*, vol. 27, no. 1-2, pp. 91–106, 1999.
- [2] Z. Durante, Q. Huang, N. Wake, R. Gong, J. S. Park, B. Sarkar, R. Taori, Y. Noda, D. Terzopoulos, Y. Choi *et al.*, “Agent ai: Surveying the horizons of multimodal interaction,” *arXiv preprint arXiv:2401.03568*, 2024.
- [3] T. Masterman, S. Besen, M. Sawtell, and A. Chao, “The landscape of emerging ai agent architectures for reasoning, planning, and tool calling: A survey,” *arXiv preprint arXiv:2404.11584*, 2024.
- [4] J. Xie, Z. Chen, R. Zhang, X. Wan, and G. Li, “Large multimodal agents: A survey,” *arXiv preprint arXiv:2402.15116*, 2024.
- [5] A. Dorri, S. S. Kanhere, and R. Jurdak, “Multi-agent systems: A survey,” *Ieee Access*, vol. 6, pp. 28 573–28 593, 2018.
- [6] Y. Li, H. Wen, W. Wang, X. Li, Y. Yuan, G. Liu, J. Liu, W. Xu, X. Wang, Y. Sun *et al.*, “Personal llm agents: Insights and survey about the capability, efficiency and security,” *arXiv preprint arXiv:2401.05459*, 2024.
- [7] X. Huang, W. Liu, X. Chen, X. Wang, H. Wang, D. Lian, Y. Wang, R. Tang, and E. Chen, “Understanding the planning of llm agents: A survey,” *arXiv preprint arXiv:2402.02716*, 2024.
- [8] T. Guo, X. Chen, Y. Wang, R. Chang, S. Pei, N. V. Chawla, O. Wiest, and X. Zhang, “Large language model based multi-agents: A survey of progress and challenges,” *arXiv preprint arXiv:2402.01680*, 2024.
- [9] X. Li, S. Wang, S. Zeng, Y. Wu, and Y. Yang, “A survey on llm-based multi-agent systems: workflow, infrastructure, and challenges,” *Vicinagearth*, vol. 1, no. 1, p. 9, 2024.
- [10] W. Van Melle, “Mycin: a knowledge-based consultation program for infectious disease diagnosis,” *International journal of man-machine studies*, vol. 10, no. 3, pp. 313–322, 1978.
- [11] B. G. Buchanan and E. A. Feigenbaum, “Dendral and meta-dendral: Their applications dimension,” in *Readings in artificial intelligence*. Elsevier, 1981, pp. 313–322.
- [12] S. Gronauer and K. Diepold, “Multi-agent deep reinforcement learning: a survey,” *Artificial Intelligence Review*, vol. 55, no. 2, pp. 895–943, 2022.
- [13] T. T. Nguyen, N. D. Nguyen, and S. Nahavandi, “Deep reinforcement learning for multiagent systems: A review of challenges, solutions, and applications,” *IEEE transactions on cybernetics*, vol. 50, no. 9, pp. 3826–3839, 2020.
- [14] P. Hernandez-Leal, B. Kartal, and M. E. Taylor, “A survey and critique of multiagent deep reinforcement learning,” *Autonomous Agents and Multi-Agent Systems*, vol. 33, no. 6, pp. 750–797, 2019.
- [15] K. Arulkumaran, M. P. Deisenroth, M. Brundage, and A. A. Bharath, “Deep reinforcement learning: A brief survey,” *IEEE Signal Processing Magazine*, vol. 34, no. 6, pp. 26–38, 2017.
- [16] M. Wooldridge and N. R. Jennings, “Intelligent agents: Theory and practice,” *The knowledge engineering review*, vol. 10, no. 2, pp. 115–152, 1995.
- [17] OpenAI, “Chatgpt by openai,” <https://openai.com/index/chatgpt/>.
- [18] Anthropic, “Claude: An ai assistant by anthropic,” <https://www.anthropic.com/claude>.
- [19] Google, “Gemini: Ai by google,” <https://gemini.google.com/app>.
- [20] DeepSeek, “Deepseek: Next-generation open llms,” <https://www.deepseek.com/>.
- [21] M. Wang, K. Izumi, and H. Sakaji, “Llmfactor: Extracting profitable factors through prompts for explainable stock movement prediction,” *arXiv preprint arXiv:2406.10811*, 2024.
- [22] G. Fatouros, K. Metaxas, J. Soldatos, and D. Kyriazis, “Can large language models beat wall street? unveiling the potential of ai in stock selection,” *arXiv preprint arXiv:2401.03737*, 2024.
- [23] A. Lopez-Lira and Y. Tang, “Can chatgpt forecast stock price movements? return predictability and large language models,” *arXiv preprint arXiv:2304.07619*, 2023.

- [24] Y. Li, Y. Yu, H. Li, Z. Chen, and K. Khashanah, "Tradinggpt: Multi-agent system with layered memory and distinct characters for enhanced financial trading performance," *arXiv preprint arXiv:2309.03736*, 2023.
- [25] W. Zhang, L. Zhao, H. Xia, S. Sun, J. Sun, M. Qin, X. Li, Y. Zhao, Y. Zhao, X. Cai *et al.*, "A multimodal foundation agent for financial trading: Tool-augmented, diversified, and generalist," in *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, 2024, pp. 4314–4325.
- [26] Z. Keskin, D. Joosten, N. Klasesen, M. Huber, C. Liu, B. Drescher, and R. H. Schmitt, "Llm-enhanced human-machine interaction for adaptive decision making in dynamic manufacturing process environments," *IEEE Access*, 2025.
- [27] S. Dikshit, A. Atiq, M. Shahid, V. Dwivedi, and A. Thusu, "The use of artificial intelligence to optimize the routing of vehicles and reduce traffic congestion in urban areas," *EAI Endorsed Transactions on Energy Web*, vol. 10, pp. 1–13, 2023.
- [28] Y. Kim, C. Park, H. Jeong, Y. S. Chan, X. Xu, D. McDuff, H. Lee, M. Ghassemi, C. Breazeal, H. Park *et al.*, "Mdagents: An adaptive collaboration of llms for medical decision-making," *Advances in Neural Information Processing Systems*, vol. 37, pp. 79 410–79 452, 2024.
- [29] J. Wei, D. Yang, Y. Li, Q. Xu, Z. Chen, M. Li, Y. Jiang, X. Hou, and L. Zhang, "Medaide: Towards an omni medical aide via specialized llm-based multi-agent collaboration," *arXiv preprint arXiv:2410.12532*, 2024.
- [30] S. Mukherjee, P. Gamble, M. S. Ausin, N. Kant, K. Aggarwal, N. Manjunath, D. Datta, Z. Liu, J. Ding, S. Busacca *et al.*, "Polaris: A safety-focused llm constellation architecture for healthcare," *arXiv preprint arXiv:2403.13313*, 2024.
- [31] N. Mehandru, B. Y. Miao, E. R. Almaraz, M. Sushil, A. J. Butte, and A. Alaa, "Evaluating large language models as agents in the clinic," *NPJ digital medicine*, vol. 7, no. 1, p. 84, 2024.
- [32] S. Mazumdar, "Ai-powered product data management in industry 4.0: A bibliographical analysis."
- [33] A. Abbas, "Ai for predictive maintenance in industrial systems," *International Journal of Advanced Engineering Technologies and Innovations*, vol. 1, no. 1, pp. 31–51, 2024.
- [34] N. Shobhana, "Ai-powered supply chains towards greater efficiency," in *Complex AI Dynamics and Interactions in Management*. IGI Global, 2024, pp. 229–249.
- [35] T. H. Davenport and J. G. Harris, "Automated decision making comes of age," *MIT Sloan Management Review*, vol. 46, no. 4, p. 83, 2005.
- [36] J. Clifton and E. Laber, "Q-learning: Theory and applications," *Annual Review of Statistics and Its Application*, vol. 7, no. 1, pp. 279–301, 2020.
- [37] A. Kumar, A. Zhou, G. Tucker, and S. Levine, "Conservative q-learning for offline reinforcement learning," *Advances in neural information processing systems*, vol. 33, pp. 1179–1191, 2020.
- [38] H. Van Hasselt, A. Guez, and D. Silver, "Deep reinforcement learning with double q-learning," in *Proceedings of the AAAI conference on artificial intelligence*, vol. 30, no. 1, 2016.
- [39] A. M. Hafiz, "A survey of deep q-networks used for reinforcement learning: state of the art," *Intelligent Communication Technologies and Virtual Mobile Networks: Proceedings of ICICV 2022*, pp. 393–402, 2022.
- [40] R. S. Sutton, D. McAllester, S. Singh, and Y. Mansour, "Policy gradient methods for reinforcement learning with function approximation," *Advances in neural information processing systems*, vol. 12, 1999.
- [41] D. Silver, J. Schrittwieser, K. Simonyan, I. Antonoglou, A. Huang, A. Guez, T. Hubert, L. Baker, M. Lai, A. Bolton *et al.*, "Mastering the game of go without human knowledge," *nature*, vol. 550, no. 7676, pp. 354–359, 2017.
- [42] H. Naveed, A. U. Khan, S. Qiu, M. Saqib, S. Anwar, M. Usman, N. Akhtar, N. Barnes, and A. Mian, "A comprehensive overview of large language models," *arXiv preprint arXiv:2307.06435*, 2023.
- [43] Z. Lin, S. Basu, M. Beigi, V. Manjunatha, R. A. Rossi, Z. Wang, Y. Zhou, S. Balasubramanian, A. Zarei, K. Rezaei *et al.*, "A survey on mechanistic interpretability for multi-modal foundation models," *arXiv preprint arXiv:2502.17516*, 2025.
- [44] W. Wang, Z. Ma, Z. Wang, C. Wu, W. Chen, X. Li, and Y. Yuan, "A survey of llm-based agents in medicine: How far are we from baymax?" *arXiv preprint arXiv:2502.11211*, 2025.
- [45] D. Ding, Y. Li, J. Wang, and H. Chen, "Large language model agent in financial trading: A survey," *arXiv preprint arXiv:2408.06361*, 2024.
- [46] Y. Li, H. Zhao, H. Jiang, Y. Pan, Z. Liu, Z. Wu, P. Shu, J. Tian, T. Yang, S. Xu *et al.*, "Large language models for manufacturing," *arXiv preprint arXiv:2410.21418*, 2024.
- [47] C. I. Garcia, M. A. DiBattista, T. A. Letelier, H. D. Halloran, and J. A. Camelio, "Framework for llm applications in manufacturing," *Manufacturing Letters*, vol. 41, pp. 253–263, 2024.
- [48] Z. Zhao, D. Tang, H. Zhu, Z. Zhang, K. Chen, C. Liu, and Y. Ji, "A large language model-based multi-agent manufacturing system for intelligent shopfloor," *arXiv preprint arXiv:2405.16887*, 2024.
- [49] Anthropic, "Introducing the model context protocol," <https://www.anthropic.com/news/model-context-protocol>, 2024, accessed: 2024-04-10.
- [50] A. Singh, A. Ehtesham, S. Kumar, and T. T. Khoei, "A survey of the model context protocol (mcp): Standardizing context to enhance large language models (llms)," 2025.
- [51] P. Lewis, E. Perez, A. Piktus, F. Petroni, V. Karpukhin, N. Goyal, H. Küttler, M. Lewis, W.-t. Yih, T. Rocktäschel *et al.*, "Retrieval-augmented generation for knowledge-intensive nlp tasks," *Advances in neural information processing systems*, vol. 33, pp. 9459–9474, 2020.
- [52] Y. Gao, Y. Xiong, X. Gao, K. Jia, J. Pan, Y. Bi, Y. Dai, J. Sun, H. Wang, and H. Wang, "Retrieval-augmented generation for large language models: A survey," *arXiv preprint arXiv:2312.10997*, vol. 2, 2023.
- [53] J. Maynez, S. Narayan, B. Bohnet, and R. McDonald, "On faithfulness and factuality in abstractive summarization," *arXiv preprint arXiv:2005.00661*, 2020.
- [54] Z. Ji, N. Lee, R. Frieske, T. Yu, D. Su, Y. Xu, E. Ishii, Y. J. Bang, A. Madotto, and P. Fung, "Survey of hallucination in natural language generation," *ACM computing surveys*, vol. 55, no. 12, pp. 1–38, 2023.
- [55] H. Inan, K. Upasani, J. Chi, R. Rungta, K. Iyer, Y. Mao, M. Tontchev, Q. Hu, B. Fuller, D. Testuggine *et al.*, "Llama guard: Llm-based input-output safeguard for human-ai conversations," *arXiv preprint arXiv:2312.06674*, 2023.
- [56] Y. Dong, R. Mu, Y. Zhang, S. Sun, T. Zhang, C. Wu, G. Jin, Y. Qi, J. Hu, J. Meng *et al.*, "Safeguarding large language models: A survey," *arXiv preprint arXiv:2406.02622*, 2024.
- [57] Y. Dong, R. Mu, G. Jin, Y. Qi, J. Hu, X. Zhao, J. Meng, W. Ruan, and X. Huang, "Building guardrails for large language models," *arXiv preprint arXiv:2402.01822*, 2024.
- [58] S. Abedu, A. Abdellatif, and E. Shihab, "Llm-based chatbots for mining software repositories: Challenges and opportunities," in *Proceedings of the 28th International Conference on Evaluation and Assessment in Software Engineering*, 2024, pp. 201–210.
- [59] V. Kumar, P. Srivastava, A. Dwivedi, I. Budhiraja, D. Ghosh, V. Goyal, and R. Arora, "Large-language-models (llm)-based ai chatbots: Architecture, in-depth analysis and their performance evaluation," in *International Conference on Recent Trends in Image Processing and Pattern Recognition*. Springer, 2023, pp. 237–249.
- [60] S. K. Dam, C. S. Hong, Y. Qiao, and C. Zhang, "A complete survey on llm-based ai chatbots," *arXiv preprint arXiv:2406.16937*, 2024.
- [61] F. Sufi, "Just-in-time news: An ai chatbot for the modern information age," *AI*, vol. 6, no. 2, 2025.
- [62] R. Iyer, V. C. Maralalalle, P. Mahesh, and D. Patil, "13 generative ai and llm: Case study in e-commerce," *Generative AI and LLMs: Natural Language Processing and Generative Adversarial Networks*, p. 253, 2024.
- [63] H. Jin, L. Huang, H. Cai, J. Yan, B. Li, and H. Chen, "From llms to llm-based agents for software engineering: A survey of current, challenges and future," *arXiv preprint arXiv:2408.02479*, 2024.
- [64] M. R. Lyu, B. Ray, A. Roychoudhury, S. H. Tan, and P. Thongtanunam, "Automatic programming: Large language models and beyond," *ACM Transactions on Software Engineering and Methodology*, 2024.
- [65] M. Hassanin and N. Moustafa, "A comprehensive overview of large language models (llms) for cyber defences: Opportunities and directions," *arXiv preprint arXiv:2405.14487*, 2024.
- [66] W. Kasri, Y. Himeur, H. A. Alkhazaleh, S. Tarapiah, S. Atalla, W. Mansoor, and H. Al-Ahmad, "From vulnerability to defense: The role of large language models in enhancing cybersecurity," *Computation*, vol. 13, no. 2, p. 30, 2025.
- [67] GitHub, "Github copilot: Your ai pair programmer," <https://github.com/features/copilot>.
- [68] Cursor, "Cursor: Ai-powered code editor," <https://www.cursor.com/en>.

- [69] Z. Chu, S. Wang, J. Xie, T. Zhu, Y. Yan, J. Ye, A. Zhong, X. Hu, J. Liang, P. S. Yu *et al.*, “Llm agents for education: Advances and applications,” *arXiv preprint arXiv:2503.11733*, 2025.
- [70] S. Sharma, P. Mittal, M. Kumar, and V. Bhardwaj, “The role of large language models in personalized learning: a systematic review of educational impact,” *Discover Sustainability*, vol. 6, no. 1, pp. 1–24, 2025.
- [71] S. Xu, X. Zhang, and L. Qin, “Eduagent: Generative student agents in learning,” *arXiv preprint arXiv:2404.07963*, 2024.
- [72] H. Jin, M. Yoo, J. Park, Y. Lee, X. Wang, and J. Kim, “Teachtune: Reviewing pedagogical agents against diverse student profiles with simulated students,” *arXiv preprint arXiv:2410.04078*, 2024.
- [73] C. E. Mower and H. Bou-Ammar, “Al-khwarizmi: Discovering physical laws with foundation models,” *arXiv preprint arXiv:2502.01702*, 2025.
- [74] K. Yang, Y. Chu, T. Darwin, A. Han, H. Li, H. Wen, Y. Copur-Gencturk, J. Tang, and H. Liu, “Content knowledge identification with multi-agent large language models (llms),” in *International Conference on Artificial Intelligence in Education*. Springer, 2024, pp. 284–292.
- [75] Y. Yan, S. Wang, J. Huo, P. S. Yu, X. Hu, and Q. Wen, “Mathagent: Leveraging a mixture-of-math-agent framework for real-world multimodal mathematical error detection,” *arXiv preprint arXiv:2503.18132*, 2025.
- [76] Y. R. Wang, J. Duan, D. Fox, and S. Srinivasa, “Newton: Are large language models capable of physical reasoning?” *arXiv preprint arXiv:2310.07018*, 2023.
- [77] A. M. Bran, S. Cox, O. Schilter, C. Baldassari, A. D. White, and P. Schwaller, “Augmenting large language models with chemistry tools,” *Nature Machine Intelligence*, vol. 6, no. 5, pp. 525–535, 2024.
- [78] S. Wang, H. Yuan, L. M. Ni, and J. Guo, “Quantagent: Seeking holy grail in trading by self-improving large language model,” *arXiv preprint arXiv:2402.03755*, 2024.
- [79] S. Wang, H. Yuan, L. Zhou, L. M. Ni, H.-Y. Shum, and J. Guo, “Alphagpt: Human-ai interactive alpha mining for quantitative investment,” *arXiv preprint arXiv:2308.00016*, 2023.
- [80] W. Xu, J. Chen, P. Zheng, X. Yi, T. Tian, W. Zhu, Q. Wan, H. Wang, Y. Fan, Q. Su *et al.*, “Deploying foundation model powered agent services: A survey,” *arXiv preprint arXiv:2412.13437*, 2024.
- [81] E. Frantar, S. Ashkboos, T. Hoefler, and D. Alistarh, “Gptq: Accurate post-training quantization for generative pre-trained transformers,” *arXiv preprint arXiv:2210.17323*, 2022.
- [82] J. Lin, J. Tang, H. Tang, S. Yang, W.-M. Chen, W.-C. Wang, G. Xiao, X. Dang, C. Gan, and S. Han, “Awq: Activation-aware weight quantization for on-device llm compression and acceleration,” *Proceedings of Machine Learning and Systems*, vol. 6, pp. 87–100, 2024.
- [83] Z. Liu, B. Oguz, C. Zhao, E. Chang, P. Stock, Y. Mehdad, Y. Shi, R. Krishnamoorthi, and V. Chandra, “Llm-qat: Data-free quantization aware training for large language models,” *arXiv preprint arXiv:2305.17888*, 2023.
- [84] Z. Yao, R. Yazdani Aminabadi, M. Zhang, X. Wu, C. Li, and Y. He, “Zeroquant: Efficient and affordable post-training quantization for large-scale transformers,” *Advances in Neural Information Processing Systems*, vol. 35, pp. 27 168–27 183, 2022.
- [85] G. Xiao, J. Lin, M. Seznec, H. Wu, J. Demouth, and S. Han, “Smoothquant: Accurate and efficient post-training quantization for large language models,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 38 087–38 099.
- [86] X. Ma, G. Fang, and X. Wang, “Llm-pruner: On the structural pruning of large language models,” *Advances in neural information processing systems*, vol. 36, pp. 21 702–21 720, 2023.
- [87] E. Frantar and D. Alistarh, “Sparsegpt: Massive language models can be accurately pruned in one-shot,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 10 323–10 337.
- [88] M. Sun, Z. Liu, A. Bair, and J. Z. Kolter, “A simple and effective pruning approach for large language models,” *arXiv preprint arXiv:2306.11695*, 2023.
- [89] I. Timiryasov and J.-L. Tastet, “Baby llama: knowledge distillation from an ensemble of teachers trained on a small dataset with no performance penalty,” *arXiv preprint arXiv:2308.02019*, 2023.
- [90] Y. Gu, L. Dong, F. Wei, and M. Huang, “Minillm: Knowledge distillation of large language models,” *arXiv preprint arXiv:2306.08543*, 2023.
- [91] C.-Y. Hsieh, C.-L. Li, C.-K. Yeh, H. Nakhost, Y. Fujii, A. Ratner, R. Krishna, C.-Y. Lee, and T. Pfister, “Distilling step-by-step! outperforming larger language models with less training data and smaller model sizes,” *arXiv preprint arXiv:2305.02301*, 2023.
- [92] S. Lu, M. Wang, S. Liang, J. Lin, and Z. Wang, “Hardware accelerator for multi-head attention and position-wise feed-forward in the transformer,” in *2020 IEEE 33rd International System-on-Chip Conference (SOCC)*. IEEE, 2020, pp. 84–89.
- [93] H. Jang, J. Kim, J.-E. Jo, J. Lee, and J. Kim, “Mnnfast: A fast and scalable system architecture for memory-augmented neural networks,” in *Proceedings of the 46th International Symposium on Computer Architecture*, 2019, pp. 250–263.
- [94] Y. Bai, H. Zhou, K. Zhao, J. Chen, J. Yu, and K. Wang, “Transformer-opu: An fpga-based overlay processor for transformer networks,” in *2023 IEEE 31st Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM)*. IEEE, 2023, pp. 221–221.
- [95] S. Zeng, J. Liu, G. Dai, X. Yang, T. Fu, H. Wang, W. Ma, H. Sun, S. Li, Z. Huang *et al.*, “Flightllm: Efficient large language model inference with a complete mapping flow on fpgas,” in *Proceedings of the 2024 ACM/SIGDA International Symposium on Field Programmable Gate Arrays*, 2024, pp. 223–234.
- [96] Y. Sheng, L. Zheng, B. Yuan, Z. Li, M. Ryabinin, B. Chen, P. Liang, C. Ré, I. Stoica, and C. Zhang, “Flexgen: High-throughput generative inference of large language models with a single gpu,” in *International Conference on Machine Learning*. PMLR, 2023, pp. 31 094–31 116.
- [97] K. Alizadeh, S. I. Mirzadeh, D. Belenko, S. Khatamifard, M. Cho, C. C. Del Mundo, M. Rastegari, and M. Farajtabar, “Llm in a flash: Efficient large language model inference with limited memory,” in *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 2024, pp. 12 562–12 584.
- [98] W. Kwon, Z. Li, S. Zhuang, Y. Sheng, L. Zheng, C. H. Yu, J. Gonzalez, H. Zhang, and I. Stoica, “Efficient memory management for large language model serving with pagedattention,” in *Proceedings of the 29th Symposium on Operating Systems Principles*, 2023, pp. 611–626.
- [99] O. Shorinwa, Z. Mei, J. Lidard, A. Z. Ren, and A. Majumdar, “A survey on uncertainty quantification of large language models: Taxonomy, open research challenges, and future directions,” *arXiv preprint arXiv:2412.05563*, 2024.
- [100] L. Huang, W. Yu, W. Ma, W. Zhong, Z. Feng, H. Wang, Q. Chen, W. Peng, X. Feng, B. Qin *et al.*, “A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions,” *ACM Transactions on Information Systems*, vol. 43, no. 2, pp. 1–55, 2025.
- [101] Z. Chen, J. Li, P. Chen, Z. Li, K. Sun, Y. Luo, Q. Mao, D. Yang, H. Sun, and P. S. Yu, “Harnessing multiple large language models: A survey on llm ensemble,” *arXiv preprint arXiv:2502.18036*, 2025.
- [102] N. Naik, “Probabilistic consensus through ensemble validation: A framework for llm reliability,” *arXiv preprint arXiv:2411.06535*, 2024.
- [103] H. Yang, M. Li, H. Zhou, Y. Xiao, Q. Fang, and R. Zhang, “One llm is not enough: Harnessing the power of ensemble learning for medical question answering,” *medRxiv*, 2023.
- [104] Z. Shen, “Llm with tools: A survey,” *arXiv preprint arXiv:2409.18807*, 2024.
- [105] S. Kapoor, B. Stroebel, Z. S. Siegel, N. Nadgir, and A. Narayanan, “Ai agents that matter,” *arXiv preprint arXiv:2407.01502*, 2024.
- [106] Y. Wu, X. Tang, T. M. Mitchell, and Y. Li, “Smartplay: A benchmark for llms as intelligent agents,” *arXiv preprint arXiv:2310.01557*, 2023.
- [107] G. Mialon, C. Fourrier, T. Wolf, Y. LeCun, and T. Scialom, “Gaiia: a benchmark for general ai assistants,” in *The Twelfth International Conference on Learning Representations*, 2023.
- [108] J. Y. Koh, R. Lo, L. Jang, V. Duvvur, M. C. Lim, P.-Y. Huang, G. Neubig, S. Zhou, R. Salakhutdinov, and D. Fried, “Visualwebarena: Evaluating multimodal agents on realistic visual web tasks,” *arXiv preprint arXiv:2401.13649*, 2024.
- [109] X. H. Lù, Z. Kasner, and S. Reddy, “Weblinx: Real-world website navigation with multi-turn dialogue,” *arXiv preprint arXiv:2402.05930*, 2024.
- [110] J. Xie, K. Zhang, J. Chen, T. Zhu, R. Lou, Y. Tian, Y. Xiao, and Y. Su, “Travelplanner: A benchmark for real-world planning with language agents,” *arXiv preprint arXiv:2402.01622*, 2024.
- [111] A. Yan, Z. Yang, W. Zhu, K. Lin, L. Li, J. Wang, J. Yang, Y. Zhong, J. McAuley, J. Gao *et al.*, “Gpt-4v in wonderland: Large multimodal models for zero-shot smartphone gui navigation,” *arXiv preprint arXiv:2311.07562*, 2023.

- [112] L. Geng and E. Y. Chang, "Realm-bench: A real-world planning benchmark for llms and multi-agent systems," *arXiv preprint arXiv:2502.18836*, 2025.
- [113] X. Gu, X. Zheng, T. Pang, C. Du, Q. Liu, Y. Wang, J. Jiang, and M. Lin, "Agent smith: A single image can jailbreak one million multimodal llm agents exponentially fast," *arXiv preprint arXiv:2402.08567*, 2024.
- [114] Y. Dong, Z. Li, X. Meng, N. Yu, and S. Guo, "Jailbreaking text-to-image models with llm-based agents," *arXiv preprint arXiv:2408.00523*, 2024.
- [115] F. Liu, Y. Feng, Z. Xu, L. Su, X. Ma, D. Yin, and H. Liu, "Jailjudge: A comprehensive jailbreak judge benchmark with multi-agent enhanced explanation evaluation framework," *arXiv preprint arXiv:2410.12855*, 2024.
- [116] F. He, T. Zhu, D. Ye, B. Liu, W. Zhou, and P. S. Yu, "The emerged security and privacy of llm agent: A survey with case studies," *arXiv preprint arXiv:2407.19354*, 2024.
- [117] A. Kumar, C. Agarwal, S. Srinivas, A. J. Li, S. Feizi, and H. Lakkaraju, "Certifying llm safety against adversarial prompting," *arXiv preprint arXiv:2309.02705*, 2023.
- [118] S. Khonneux, A. Sordoni, S. Günnemann, G. Gidel, and L. Schwinn, "Efficient adversarial training in llms with continuous attacks," *arXiv preprint arXiv:2405.15589*, 2024.
- [119] R. Behnia, M. R. Ebrahimi, J. Pacheco, and B. Padmanabhan, "Ew-tune: A framework for privately fine-tuning large language models with differential privacy," in *2022 IEEE International Conference on Data Mining Workshops (ICDMW)*. IEEE, 2022, pp. 560–566.
- [120] T. Singh, H. Aditya, V. K. Madiseti, and A. Bahga, "Whispered tuning: Data privacy preservation in fine-tuning llms through differential privacy," *Journal of Software Engineering and Applications*, vol. 17, no. 1, pp. 1–22, 2024.
- [121] M. Franco, O. Gaggi, and C. E. Palazzi, "Integrating content moderation systems with large language models," *ACM Transactions on the Web*, 2024.
- [122] U. Kulsum, H. Zhu, B. Xu, and M. d'Amorim, "A case study of llm for automated vulnerability repair: Assessing impact of reasoning and patch validation feedback," in *Proceedings of the 1st ACM International Conference on AI-Powered Software*, 2024, pp. 103–111.